



WIRING PIN ASSIGNMENT:  
 P1 EIA/TIA 568-B.2 P2

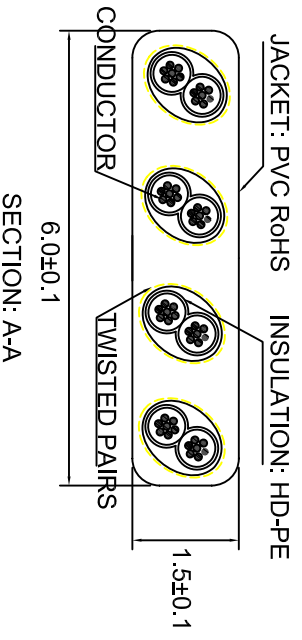

NOTE:  
 1. 100% OPEN/SHORT, MISSWIRING AND INTERMITTENCE TEST  
 2. RoHS COMPLIANT, ALL MATERIAL AND PROCESS MUST MEET THE REQUIREMENT OF RoHS  
 3. BAG PACKING PER PIECE

FLAT CAT5e UTP CABLE BLACK	PART No.	LENGTH	TOLERANCE
	4096	500	±15
	4097	1000	±20
	4098	1500	±20
	4099	2000	±25
	4100	3000	±25
	4101	5000	±30
	4102	10000	±50
	4103	15000	±100

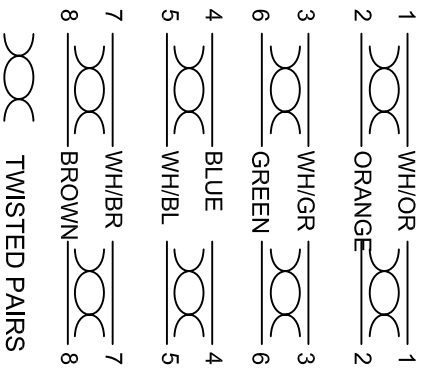

X.±1	X.±1
.X±0.3	.X±
.XXX±0.20	.XX±
.XXX±0.100	.XXX±
UNITS:	mm

TEST DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIDER CABLE AND SHALL NOT BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIDER CABLE.

ITEM	DESCRIPTION	QTY/UNIT
1	NAME	
2	CABLE	
3	OVERMOLD	
4	CONNECTOR	

ITEM	DESCRIPTION	QTY/UNIT
1	NAME	
2	CABLE	
3	OVERMOLD	
4	CONNECTOR	

MFG: WIDERCABLE	TITLE: Flat CAT5e UTP Cable Black
APPD: STEVEN Ng	RoHS COMPLIANT
CHKD: JENNY Tsang	DATE: 2016.12.02
DRAW: SIMON Ng	SCALE: 1:1
	SHEET: 1/1
	REV: C